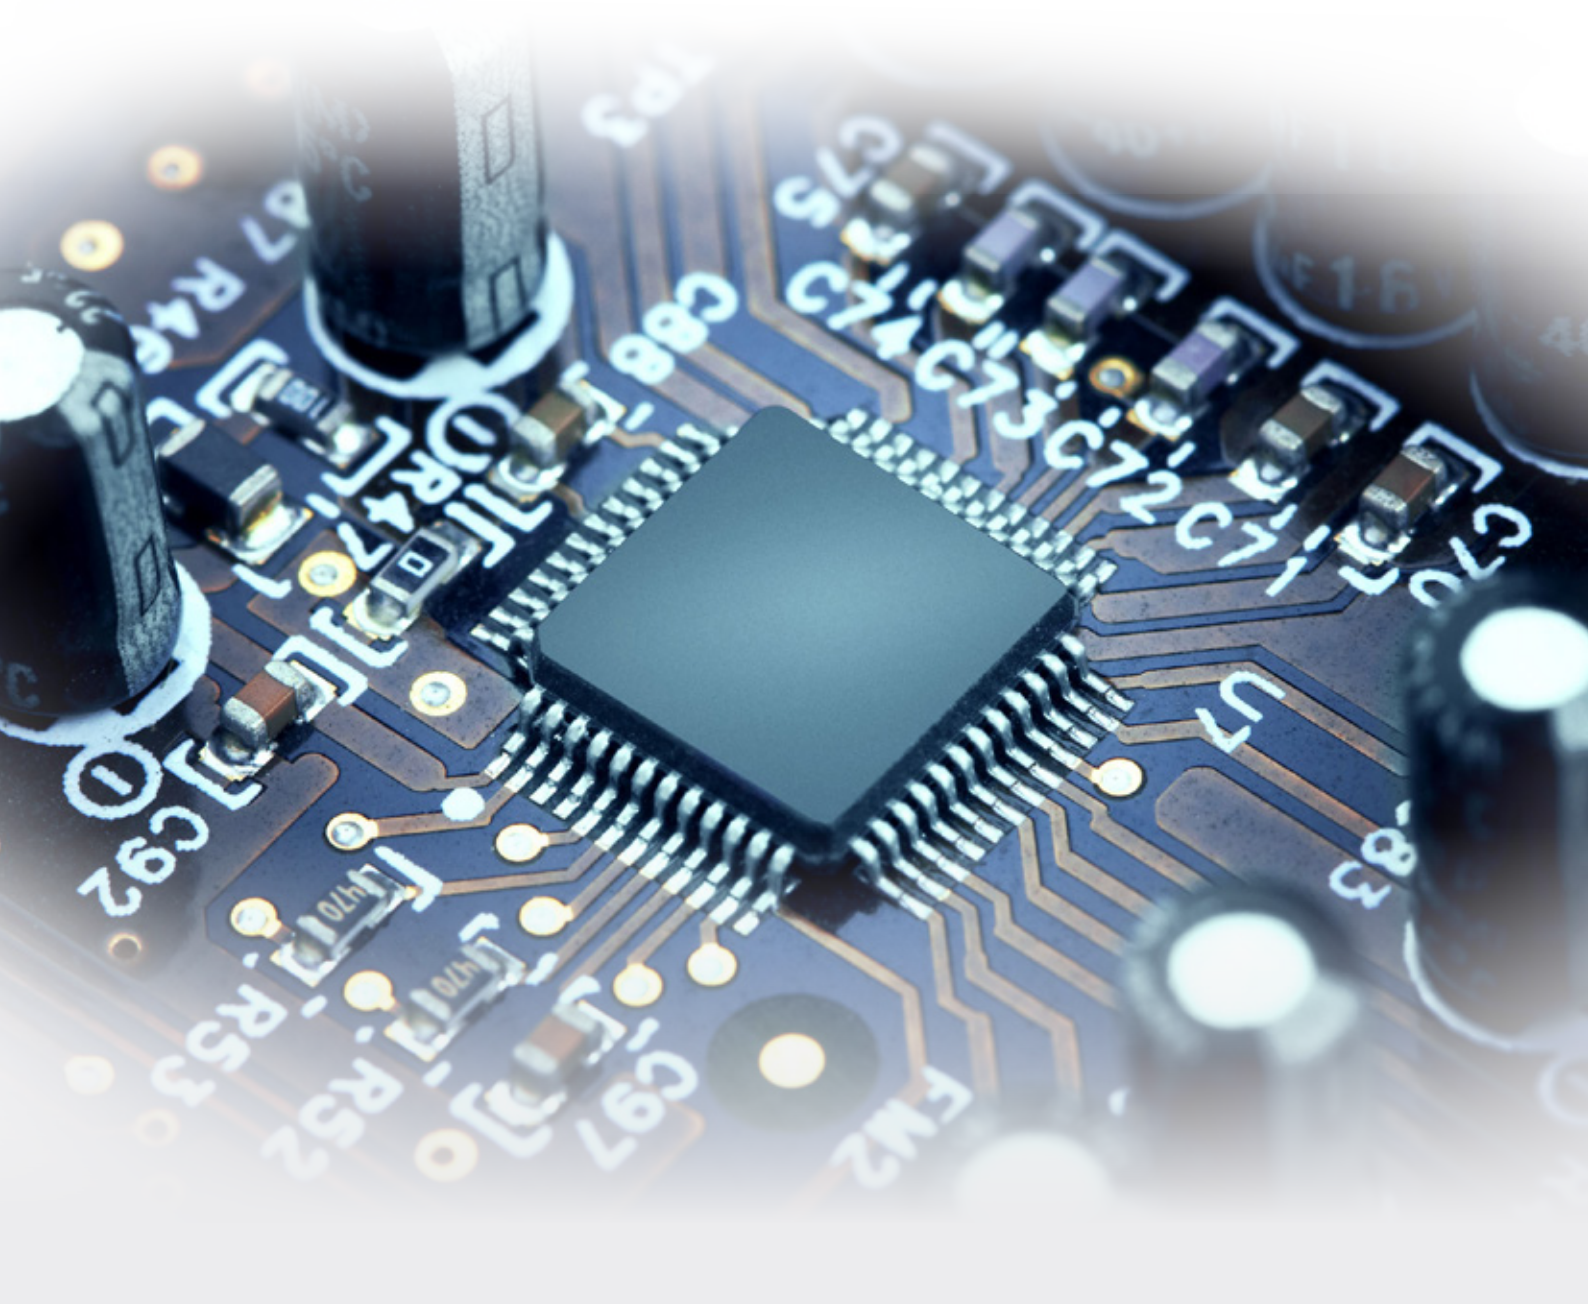


# QUALITY PERFORMS.



**LANXESS Bromine Solutions**  
Flame retardants product guide

**QUALITY WORKS.**

**LANXESS**  
Energizing Chemistry

# A GLOBAL LEADER IN FLAME RETARDANTS

## INNOVATIVE. RELIABLE. SUSTAINABLE.

Resulting from decades of hard work, innovation and lessons learned, the LANXESS Bromine Solutions of today is positioned to be an excellent partner to our customers for bromine, phosphorus and antimony-based flame retardant needs, both now and far into the future.

For almost a century, we have helped our customers to meet their flame retardant needs with a broad portfolio of products and solutions. In late 2010, the Great Lakes Solutions business was introduced with a mission to build on its well-established heritage, by introducing differentiated, innovative products and greener, sustainable solutions while maintaining performance and quality.

We are proud of our history and look forward to helping our customers meet future performance, safety and compliance requirements by constantly improving our portfolio with new and improved products for maximum sustainability.



## CONTENTS

- 02** Introduction
- 04** Flame retardants – saving lives
- 05** Technical data:  
Antimony, synergists, smoke suppressants
- 06** Flame retardants selection guide
- 08** Technical data:  
Bromine-based flame retardants



## FLAME RETARDANTS – SAVING LIVES

Fire kills thousands of people each year throughout the world, but many are spared because fires are slowed or never start due to the use of flame retardants. LANXESS Bromine Solutions is a global leader in flame retardant products and solutions for use in applications such as furniture foam, electronic components, electrical enclosures, building products and more.

LANXESS Bromine Solutions believes the public should not be forced to choose between environmental and fire safety and that we must have both. Our business demands the highest standards of both fire retardancy performance and environmental sustainability. To meet these increasingly complex challenges, LANXESS Bromine Solutions offers a wide range of flame retardant solutions that allow OEM's the versatility to meet their individual needs.

Brominated flame retardants are used in a variety of applications from electronic housings to printed circuit boards and electrical connectors to flexible and rigid polyurethane foam. Brominated flame retardants provide optimal processing while maintaining outstanding physical properties in a cost effective manner.



### Synergists & smoke suppressants

Smokebloc® / BFR	Series of products with combined flame retardants and / or afterglow and / or smoke suppressing properties. Used as partial or complete replacement for antimony oxide in PVC formulations.
Ongard® 2 (Available in Europe)	Proprietary zinc/magnesium complex, effective smoke suppressant for PVC with excellent heat aging properties. Cost effective antimony oxide replacement for stringent rigid PVC applications.
Thermoguard® CPA	Flame retardant synergists for PVC with low smoke performance. Used as partial or complete replacement for antimony oxide in PVC applications.

## ANTIMONY, SYNERGISTS & SMOKE SUPPRESSANTS

### Antimony trioxide

Typical values	Antimony oxide content (as Sb <sub>2</sub> O <sub>3</sub> )	Arsenic content (as As) (max)	Iron content (as Fe) (max)	Lead content (asPb) (max)	Av. particle size (typical values)
TMS® / Timonox® Red Star / Fireshild® H / Thermoguard® S	99.3%	0.25%	0.003%	0.20%	1.0–1.5 μm
TMS® / Timonox® White Star	99.5%	0.25%	0.003%	0.07%	1.0–1.5 μm
TMS-HP® / Timonox® Blue Star Polymer Grade / Fireshild® HB / Fireshild® H-HPM / Thermoguard® HPM (Products registered in Europe)	99.5%	0.09%	0.003%	0.10%	0.9–1.5 μm
Trutint® 50	99.3%	0.30%	0.005%	0.20%	2.3 μm
Fireshild® L / Thermoguard® L	99.3%	0.30%	0.002%	0.20%	2.0–3.2 μm
Microfine® A05 / Microfine® A03 / Ultrafine™ II	99.3%	0.30%	0.003%	0.20%	0.3–0.9 μm

### Sodium antimonate

Typical values	Antimony oxide content (as Sb <sub>2</sub> O <sub>3</sub> )	Arsenic content (as As) (max)	Iron content (as Fe) (max)	Lead content (asPb) (max)	Av. particle size (typical values)
Pyrobloc® SAP-2 / Thermoguard® FR	60.4	0.09%	0.005%	0.09%	2 μm

### Zinc borate

Typical values	Stoichiometry (°C, % mass loss)	TGA	Av. particle size
ZB-223	2ZnO.2B <sub>2</sub> O <sub>3</sub> .3H <sub>2</sub> O	200 °C 1% 245 °C 5% 285 °C 10%	4 μm
ZB-467	4ZnO.6B <sub>2</sub> O <sub>3</sub> .7H <sub>2</sub> O	280 °C 1% 380 °C 5% 420 °C 10%	4 μm

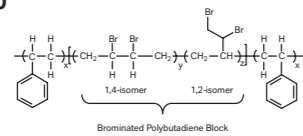



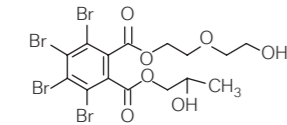
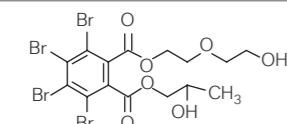
# FLAME RETARDANTS SELECTION GUIDE

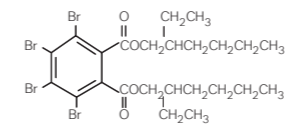
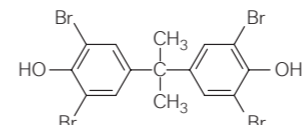
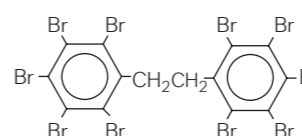

	Polyolefins	Polypropylene	Polyethylene	TPO (thermoplastic polyolefin)	EPDM	PVC	Styrenics	HIPS (high impact polystyrene)	ABS	PC/ABS (polycarbonate / ABS blends)
<b>Bromine-based flame retardants</b>										
Emerald Innovation <sup>®</sup> 3000										
PDBS-80 <sup>™</sup>										
Firemaster <sup>®</sup> CP-44HF										
Firemaster <sup>®</sup> PBS-64HW										
PHT-4 <sup>™</sup> †										
PHT4-Diol <sup>™</sup> †										
PHT4-Diol LV <sup>™</sup> †										
Firemaster <sup>®</sup> 504										
Firemaster <sup>®</sup> 508										
DP-45 <sup>™</sup>					■	■				
BA-59 <sup>™</sup> †								■		
Firemaster <sup>®</sup> BZ-54*						■				
Firemaster <sup>®</sup> 600*										
Firemaster <sup>®</sup> 602*										
BC-52 <sup>™</sup>										■
BC-58 <sup>™</sup>										■
Firemaster <sup>®</sup> 2100R	■	■	■	■			■	■	■	■
PH-73FF <sup>™</sup> †										
<b>Antimony-based synergists</b>										
TMS <sup>®</sup> / Timonox <sup>®</sup> Red Star/Fireshield <sup>®</sup> H / Thermoguard <sup>®</sup> S*	■	■	■	■	■	■	■	■	■	■
Trutint <sup>®</sup> / Fireshield <sup>®</sup> L / Thermoguard <sup>®</sup> L*	■	■	■			■				
Microfine <sup>®</sup> / Ultrafine <sup>™</sup> II*	■	■	■			■	■	■	■	■
Pyrobloc <sup>®</sup> SAP2 / Thermoguard <sup>®</sup> FR*										■
<b>Other synergists / smoke suppressants</b>										
Zinc Borate ZB-223						■				
Zinc Borate ZB-467	■	■	■	■	■	■	■		■	
Smokebloc <sup>®</sup> blends						■				
Ongard <sup>®</sup> 2						■				
Thermoguard <sup>®</sup> CPA						■				

■ Recommended ■ Suitable † Reactive flame retardant used during polymerization. \* Products not registered for sale in Europe.

	PPE/HIPS blends	XPS	EPS	Polyurethane	Rigid (polyurethane (PUR/ PIR)	Flexible polyurethane	TPU	Thermosets	UPE (unsaturated polyester)	Epoxy	Phenolics	Engineering thermoplastics	PA 6	PA 66	HTPA	PBT	PET	PC
		■	■															
													■	■	■	■	■	
													■	■	■	■	■	
									■									
					■		■											
					■		■											
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													
					■													

# BROMINE-BASED FLAME RETARDANTS

		Viscosity/ melting range °C	Volatility TGA, Wt. loss @ temp	Typical specific gravity	Bulk density g/ml	Solubility (g/100 g solvent @ 25 °C)
<b>Emerald Innovation® 3000</b> Brominated polymeric Bromine content: 64 %		Softening 120	5% @ 255°C 10% @ 260°C 50% @ 280°C	1.9	0.5 (L) 0.7 (P)	Water <0.1 Methylene chloride >20 Methanol <0.1 Styrene >20
	CAS No. 1195978-93-8					
<b>PDBS-80™</b> Poly (dibromostyrene) Formula weight: 50,000 Bromine content: 59.0%		Tg: 144	5% @ 368°C 10% @ 378°C 50% @ 404°C 95% @ 544°C	1.9	1.11 (P)	Water <0.1 Dichloromethane C Toluene C Methanol <0.1 MEK 2
	CAS No. 88497-56-7					
<b>Firemaster® CP44-HF</b> Copolymer of dibromostyrene Formula weight: ~16,000 Bromine content: 64–65%	Proprietary	Tg: 147	1% @ 316°C 5% @ 347°C	2.0		Water Insoluble Toluene C Methylene chloride P MEK P Methanol Insoluble Acetone Insoluble
	CAS No. 88497-56-7					
<b>Firemaster® PBS-64HW</b> Poly (dibromostyrene) Formula weight: 40,000 Bromine content: 64.0%		Tg: 156	5% @ 356°C 10% @ 371°C 50% @ 401°C	2.0	1.25 (P)	Water <0.1 Dichloromethane C Toluene C Methanol <0.1 MEK P
	CAS No. 88497-56-7					
<b>PHT4™</b> Tetrabromophthalic anhydride Formula weight: 463.7 Bromine content: 68.2%		274–277	5% @ 229°C 10% @ 242°C 50% @ 277°C	2.9	1.37 (L) 2.09 (P)	Water <0.1 Dichloromethane 1 Toluene 6 Methanol 1.6 MEK 2.6
	CAS No. 632-79-1					
<b>PHT4-Diol™</b> Tetrabromophthalate diol Formula weight: 627.9 Bromine content: 46.0%		90,000 cps @ 25°C	5% @ 128°C 10% @ 166°C 50% @ 319°C 95% @ 380°C	1.9		Water <0.5 Dichloromethane C Toluene C Methanol 9 MEK C
	US CAS No. 77098-07-8 EU CAS No. 20566-35-2					
<b>PHT4-Diol™ LV</b> Tetrabromophthalate diol Formula weight: 627.9 Bromine content: 43%		22,500 cps @ 25°C	5% @ 127°C 10% @ 151°C 50% @ 325°C 95% @ 382°C	1.7		Water <0.5 Dichloromethane C Toluene C Methanol 9 MEK C
	CAS No. 77098-07-8 EU CAS No. 20566-35-2					
<b>Firemaster® 504</b> Tetrabromophthalate diol blend Bromine content: 18% (This product is not registered for sale in Europe)	Proprietary	350–500 cps @ 25°C	5% @ 147°C 10% @ 167°C 50% @ 211°C	1.45		Water <0.1 Dichloromethane C Toluene C MEK C Methanol C MEK C
<b>Firemaster® 508</b> Tetrabromophthalate diol blend Bromine Content: 37% This product is not registered for sale in Europe)	Proprietary	8800 cps @ 25°C	5% @ 136°C 10% @ 157°C 50% @ 285°C	1.67		Water <0.1 Dichloromethane C Toluene C MEK C Methanol C MEK C

		Viscosity/ melting range °C	Volatility TGA, Wt. loss @ temp	Typical specific gravity	Bulk density g/ml	Solubility (g/100 g solvent @ 25 °C)
<b>DP-45™</b> Tetrabromophthalate ester Formula weight: 706.1 Bromine content: 45%		1800 cps @ 25°C	5% @ 211°C 10% @ 226°C 50% @ 268°C 95% @ 291°C	1.6		Water <0.1 Dichloromethane C Toluene C Methanol 5.7 MEK C
	CAS No. 26040-51-7					
<b>BA-59P™</b> Tetrabromobisphenol A Formula weight: 543.7 Bromine content: 59%		179–182	5% @ 244°C 10% @ 261°C 50% @ 301°C	2.2	0.96 (L) 1.36 (P)	Water <0.1 Acetone 225 Dichloromethane 27 Toluene 6 Methanol 80 MEK 168
	CAS No. 79-94-7					
<b>Firemaster® BZ-54</b> Tetrabromophthalic anhydride derivative Bromine content: 54% (This product is not registered for sale in Europe)	Proprietary	800 cps @ 25°C	5% @ 211°C 10% @ 226°C 50% @ 268°C 95% @ 291°C	1.7		Water <0.1 Dichloromethane C Toluene C Methanol 5.7 MEK C
<b>Firemaster® 600</b> Tetrabromobenzoate ester composition Bromine content: 27% Phosphorus content: 4% (This product is not registered for sale in Europe)	Proprietary Blend	200 cps @ 25°C	5% @ 210°C 10% @ 226°C 25% @ 249°C 50% @ 269°C	1.4		Water <0.1 Dichloromethane C Toluene 9.47 Methanol C MEK C
<b>Firemaster® 602</b> Tetrabromobenzoate ester composition Bromine content: 27% Phosphorus content: 4% (This product is not registered or sale in Europe)	Proprietary Blend	200 cps @ 25°C	5% @ 217°C 10% @ 234°C 25% @ 257°C 50% @ 279°C	1.4		Water <0.1 Dichloromethane C Toluene 9.40 Methanol C MEK C
<b>BC-52™</b> Phenoxy-terminated carbonate oligomer of Tetrabromobisphenol A Formula Weight: ~2,500 Bromine Content: 52%	Proprietary	180–210	5% @ 408°C 10% @ 438°C 50% @ 480°C	2.2	0.61 (L) 1.00 (P)	Water <0.1 Dichloromethane C Toluene 14 Methanol <0.1 MEK C
	CAS No. 94334-64-2					
<b>BC-58™</b> Phenoxy-terminated carbonate oligomer of tetrabromobisphenol A Formula weight: ~3,500 Bromine content: 58%	Proprietary	200–230	5% @ 380°C 10% @ 423°C 50% @ 475°C	2.2	0.66 (L) 1.02 (P)	Water <0.1 Dichloromethane C Toluene 14 Methanol <0.1 MEK C
	CAS No. 71342-77-3					
<b>Firemaster® 2100R</b> Decabromodiphenyl ethane Formula weight: 971.2 Bromine content: 81-82%		348–353	1% @ 314°C 5% @ 344°C 50% @ 402°C 90% @ 423°C	3.2	1.19 (L) 1.39 (P)	Water <0.01 Dichloromethane <0.01 Toluene <0.01 Methanol <0.01 MEK <0.01
	CAS No. 84852-53-9					
<b>PH-73FF™</b> 2,4,6 Tribromophenol Formula weight: 330.8 Bromine content: 72.5%		91–95	5% @ 122°C 10% @ 134°C 50% @ 167°C 95% @ 183°C	2.2	1.4 (L) 1.41 (P)	Water <0.1 Dichloromethane 36 Toluene 50 Methanol 84 MEK 225
	CAS No. 118-79-6					

## Notes:

TGA:  
10 mg @ 10°C/min., N<sub>2</sub>

Bulk Density:  
L denotes loose  
P denotes packed

Solubility:  
C denotes complete solubility (100 g/100 ml)  
P denotes partial solubility



**LANXESS Solutions US Inc.  
formerly Chemtura Corporation**

199 Benson Road  
Middlebury, CT 06749  
USA  
Tel: +1-203-573-2000

[add.lanxess.com](http://add.lanxess.com)

This information and our advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.

Edition 04/2017

® = trademark of LANXESS Deutschland GmbH or its affiliates, registered in many countries in the world.